



Funded by  
the European Union

# Temperature Sensors

Author: prof.dr. Hazim Bašić  
Univerzitet Džemal Bijedić  
Mašinski fakultet Mostar

Sensor Systems 15.04.2025

"Funded by the European Union. Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union. Neither the European Union nor the granting authority can be."

**Partnership for Promotion and Popularization of Electrical Mobility through  
Transformation and Modernization of WB HEIs Study Programs/PELMOB**

Call: ERASMUS-EDU-2022-CBHE-STRAND-2

Project Number: 101082860

# Outline

- Thermocouples
  - overview, reference junction, proper connections, types, special limits of error wire, time constants, sheathing, potential problems
- RTDs
  - overview, bridges, calibration, accuracy, response time, potential problems
- Thermistors
- Infrared Thermometry
  - fundamentals, emissivity determination, field of view
- How to Choose
  - Standards, cost, accuracy, stability, sensitivity, size, contact/non-contact, temperature range, fluid type

# Thermocouples


## Seebeck effect

- If two wires of dissimilar metals are joined at both ends and one end is heated, current will flow
- If the circuit is broken, there will be an open circuit voltage across the wires
- Voltage is a function of temperature and metal types
- For small temperature difference, the relationship with temperature is linear


$$\Delta V = \alpha \Delta T$$

- For larger temperature difference, non-linearities may occur

# Measuring the Thermocouple Voltage

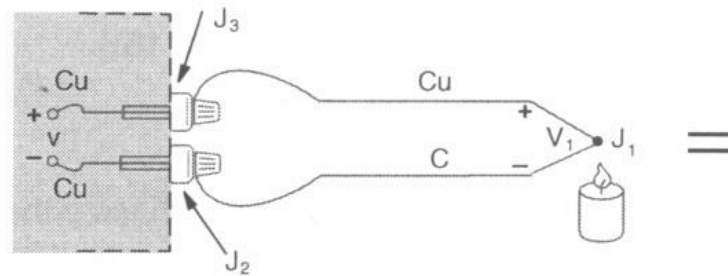

EQUIVALENT CIRCUITS

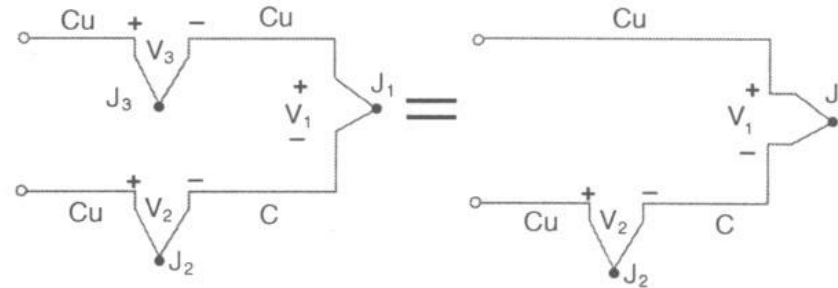


Displayed voltage will be **proportional to the difference between  $J_1$  and  $J_2$**  (and hence  $T_1$  and  $T_2$ ).

Note that this is “Type T” thermocouple


# External Reference Junction

A solution is to put  $J_2$  in an ice-bath; then **you know  $T_2$** , and your output voltage will be proportional to  $T_1 - T_2$

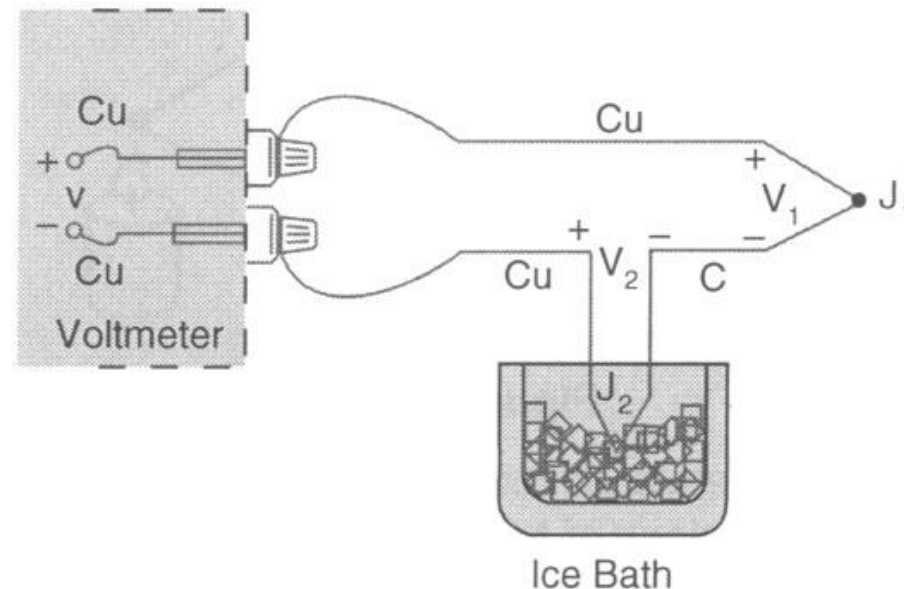


# Other types of thermocouples

- Many thermocouples don't have one copper wire. Shown below is a "Type J" thermocouple
- If the two terminals (J3, J4) aren't at the same temperature, this also creates an error

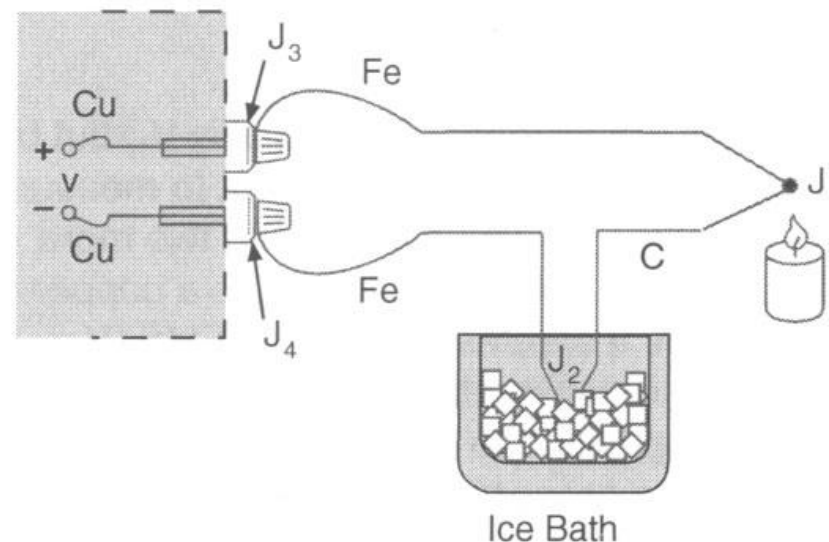

# Isothermal Block

- The block is an **electrical insulator but good heat conductor**. This way the voltages for  $J_3$  and  $J_4$  cancel out. Thermocouple data acquisition set-ups include these isothermal blocks.
- If we eliminate the ice-bath, then the isothermal block temperature is reference temperature

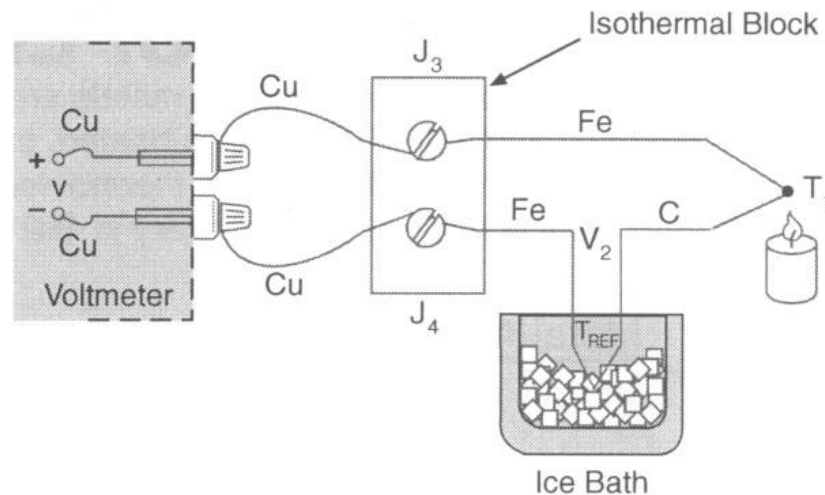

# Software Compensation

- How one can find the temperature of the block? Use a thermister or RTD.
- **Once the temperature is known**, the voltage associated with that temperature can be subtracted off.
- Then why use thermocouples at all?
  - Thermocouples are cheaper, smaller, more flexible and rugged, and operate over a wider temperature range.
- Most data acquisition systems have software compensation built in. To use Labview, you'll need to know if you have a thermister or RTD.




# Hardware Compensation

- With hardware compensation, **the temperature of the isothermal block again is measured**, and then a battery is used to cancel out the voltage of the reference junction.
- This is also called an **“electronic ice point reference”**. With this reference, one can use a normal voltmeter instead of a thermocouple reader. You need a separate ice-point reference for every type of thermocouple.


# Making Thermocouple Beads

- Soldering, silver-soldering, butt or spot or beaded gas welding, crimping, and twisting are all OK.
- **The third metal introduced doesn't affect results** as long as the temperature everywhere in the bead is the same.
- Welding should be done carefully so as to not degrade the metals
- It is possible to use a thermocouple welder; the wire ends are placed in the appropriate opening, and welding is performed by pressing a button

# Time Constant vs. Wire Diameter

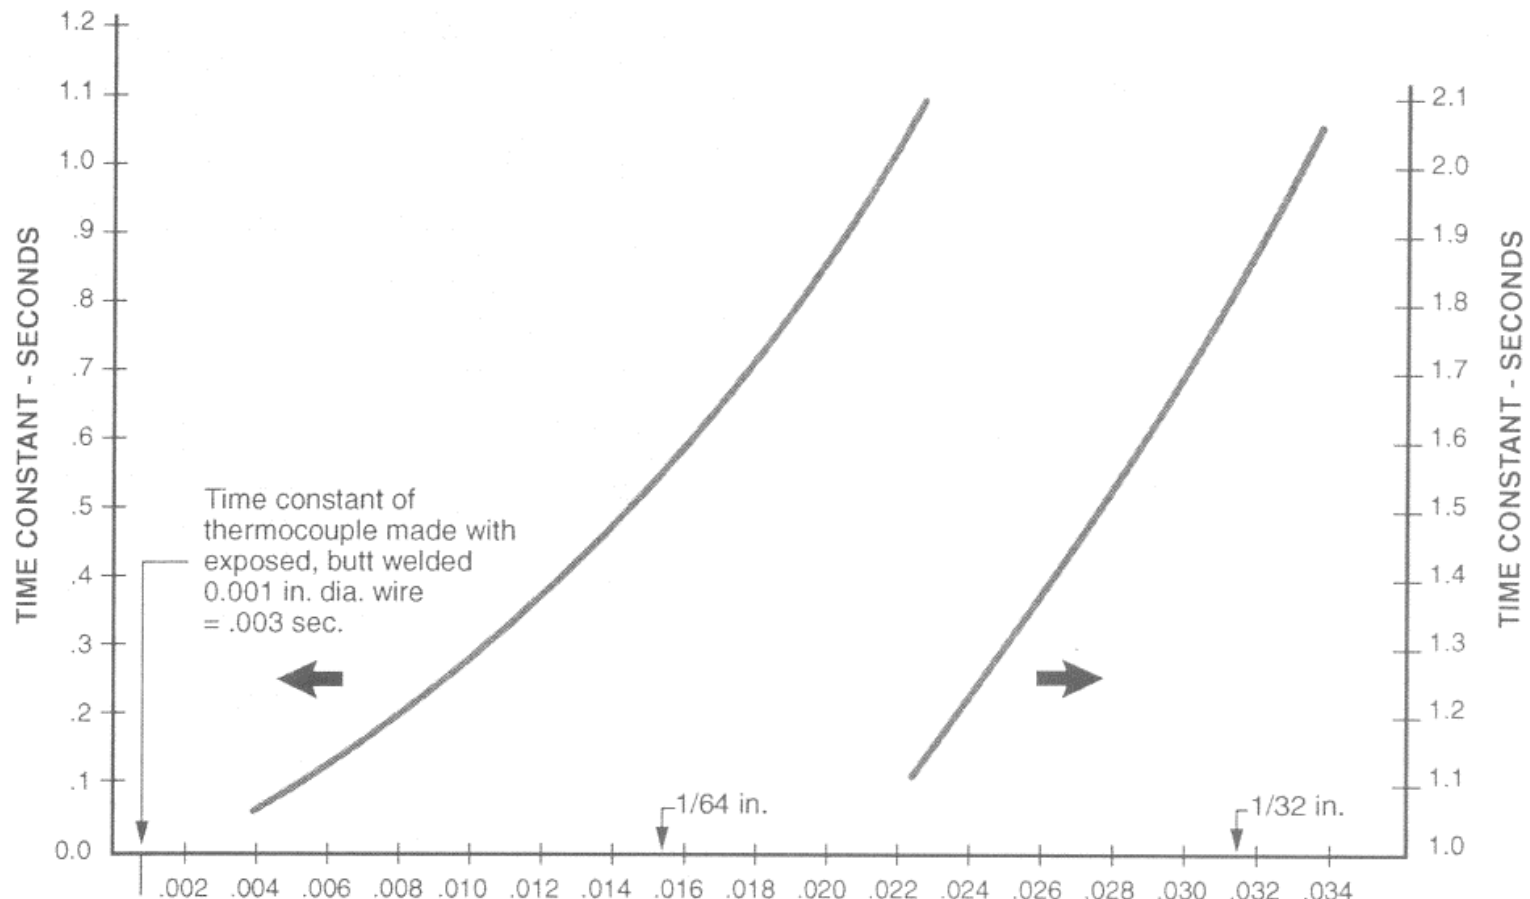

# Time Constant vs. Wire Diameter, cont.

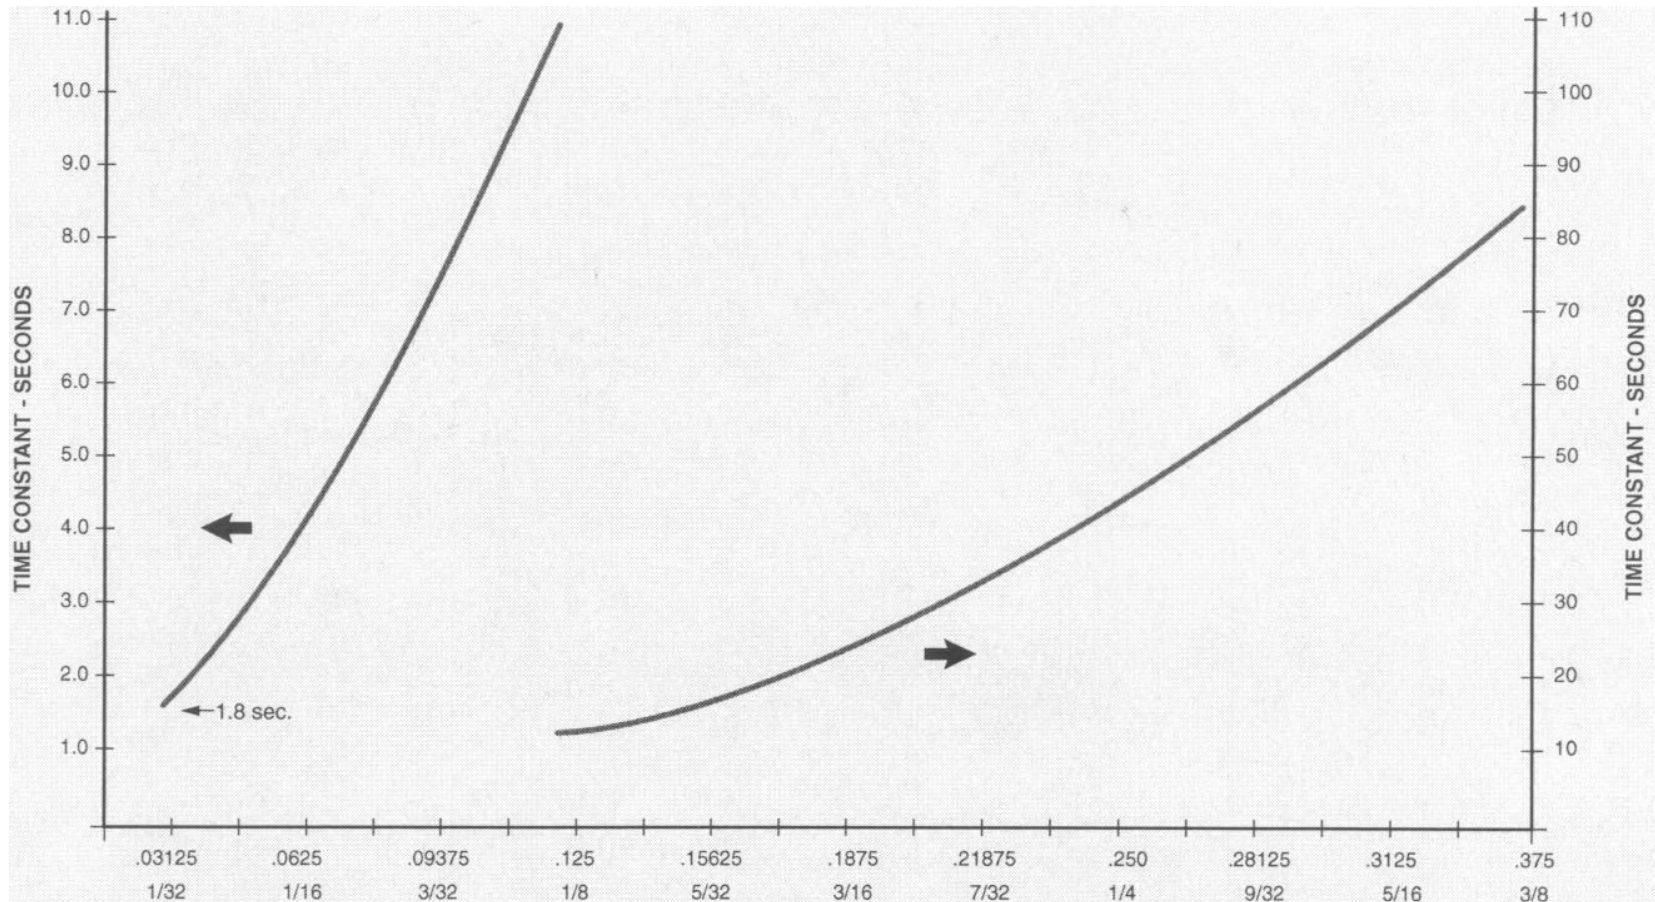

# Thermocouple Types

Thermocouple Types			
Type	Conductor Combination	Temperature Range	
		°F	°C
B	Platinum 30% Rhodium / Platinum 6% Rhodium	2500 to 3100	1370 to 1700
E	Nickel-chromium / Constantan	32 to 1600	0 to 870
J	Iron / Constantan	32 to 1400	0 to 760
K	Nickel-chromium / Nickel-aluminium	32 to 2300	0 to 1260
N	Nicrosil / Nisil	32 to 2300	0 to 1260
R	Platinum 13% Rhodium / Platinum	1600 to 2640	870 to 1450
S	Platinum 10% Rhodium / Platinum	1800 to 2640	980 to 1450
T	Copper / Constantan	75 to 1700	50 to 1270

# Thermocouple Types

- **Type B** – very poor below 50 °C; reference junction temperature not important since voltage output is about the same from 0 to 42 °C
- **Type E** – good for low temperatures since  $dV/dT$  (a) is high for low temperatures
- **Type J** – cheap because one wire is iron; high sensitivity but also high uncertainty (iron impurities cause inaccuracy)
- **Type T** – good accuracy but low max temperature (400 °C); one lead is copper, making connections easier; watch for heat being conducted along the copper wire
- **Type K** – popular type since it has decent accuracy and a wide temperature range; some instability (drift) over time
- **Type N** – most stable over time when exposed to elevated temperatures for long periods

# Sheathing

- Sheathing of wires protects them from the environment (fracture, oxidation, etc.) and shields them from electrical interference
- The sheath should extend completely through the medium of interest. Outside the medium of interest it can be reduced.
- Sometimes the bead is exposed and only the wire is covered by the sheath. In harsher environments, the bead is also covered. This will increase the time constant.
- Platinum wires should be sheathed in non-metallic sheaths since they have a problem with metallic vapor diffusion at high temperatures.



# Potential Problems

- Poor bead construction
  - **Weld changed** material characteristics because the weld temp. was too high.
  - Large solder bead with temperature gradient across it
- **Decalibration**
  - If thermocouples are used for very high or cold temperatures, wire properties can change due to diffusion of insulation or atmosphere particles into the wire, cold-working, or annealing.
  - **Inhomogeneities in the wire**; these are especially bad in areas with large temperature gradients; esp. common in iron. Metallic sleeving can help reduce their effect on the final temperature reading.



# Potential Problems

- **Conduction along the thermocouple wire**
  - In areas of large temperature gradient, heat can be conducted along the thermocouple wire, changing the bead temperature.
  - Small diameter wires conduct less of this heat.
  - T-type thermocouples have more of a problem with this than most other types since one of the leads is made of copper which has a high thermal conductivity.
- **Inaccurate ice-point**

# Potential Problems

- Galvanic Action
  - The dyes in some insulations form an electrolyte in the water. This **creates a galvanic action** with a resulting emf potentially many times that of the thermocouple. Use an appropriate shield for a wet environment.
  - “T Type” thermocouples have less of a problem with this.